

Tiger DR HR DDS Sensor Vet



High Resolution Intra-Oral CMOS Imaging Sensors



Simple Workflow – Instant Image – Highest Image Quality

Design and Innovation Excellence

Your successful veterinary practice deserves superior imaging equipment. The TigerDR ñ DDS Sensor Vet along with industry leading TigerView imaging software delivers the image quality that is expected by veterinary practitioners.

It is designed for exceptional diagnostic image quality. Detect pathologies under the gum that are not visible during routine exams without radiographs.

Ensure the best patient care as it improves office workflow. It is designed to reduce scatter and concentrate the energy to positively influence the best image quality and allow for faster transmission of high-resolution images.

TigerView imaging software is a complete image management system to acquire, store, view and share images. TigerView provides functionality that will significantly improve your work flow by providing better patient management and accurate diagnosis.



2m Bend-Resistant Direct USB Cable



Instantaneous image acquisition time




Highest pixel image quality



Highest resolution at 20 LP/MM



3 year warranty

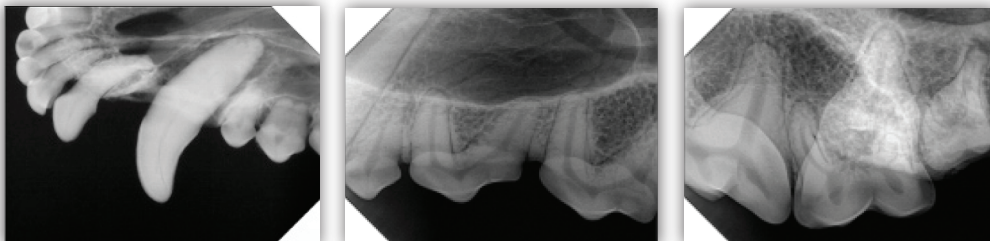

Call us for an in-office demo today
PH: 678-685-8866



Distributed By: Georgia X-Ray

11 Public Square | Bowman, GA. 30624 | PH: 678-685-8866
www.xrayofga.com



Tiger DR - HR DDS Sensor Vet

High Resolution Intra-Oral CMOS Imaging Sensors

SPECIFICATIONS

Sensor	S11684-12	S11685-12
Scintillator	CsI (TI)	CsI (TI)
Images Size (H x V)	20 x 30 mm	26 x 34 mm
Pixel Size	20 x 20 μ m	20 x 20 μ m
Pixel Pitch (H x V)	20	20
Total Pixels (H x V)	1000 x 1506	1000 x 1706
Total Effective Pixels	1000 x 1500	1000 x 1700
Number of Light-Shielded Pixels		
Upper Part	766, 768, 770	756, 758, 760
Lower Part	1000 x 3	1000 x 3
Image Quality		
Resolution	20 lp	20 lp
Energy		
Incident X-Ray Energy	20-90 kVp	20-90 kVp
Total Irradiation Dose	57.6Gy	57.6Gy
Sensitivity	~19 LSB/ μ Gy	~19 LSB/ μ Gy
Saturation Dose	~260 μ Gy	~260 μ Gy
Dynamic Range	57 dB	57 dB
Communication Interface		
Communication Interface	USB 2.0	USB 2.0

Environmental	S11684-12	S11685-12
Operating		
Temperature Range	0 - 35 ^\circ C	
Humidity Range (non-condensing)	70% Max	
Storage		
Temperature Range	-20 ^\circ C - 70 ^\circ C	
Humidity Range	70% Max	
Water / Dust Proof	IP67	
Mechanical		
Dimensions (mm)	39 x 25 x 12	42 x 30 x 13
Weight	56 g	60 g

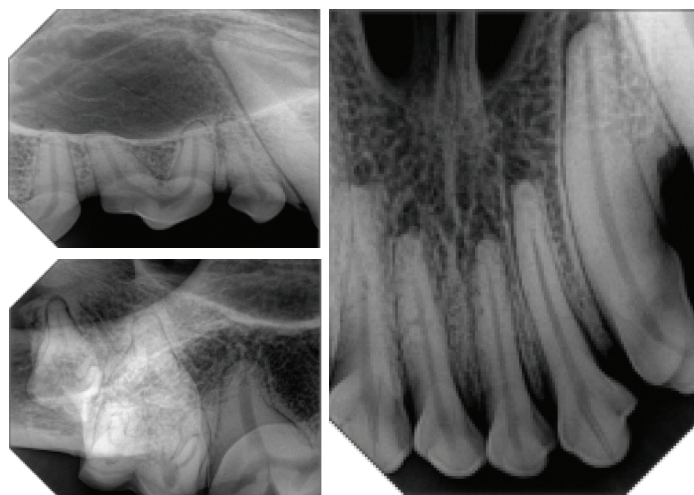

Call us for an in-office demo today
PH: 678-685-8866

Distributed By: Georgia X-Ray

11 Public Square | Bowman, GA. 30624 | PH: 678-685-8866
www.xrayofga.com